


# 5 T CONVENTIONAL ROTATORS Double Drive SPECIFICATION

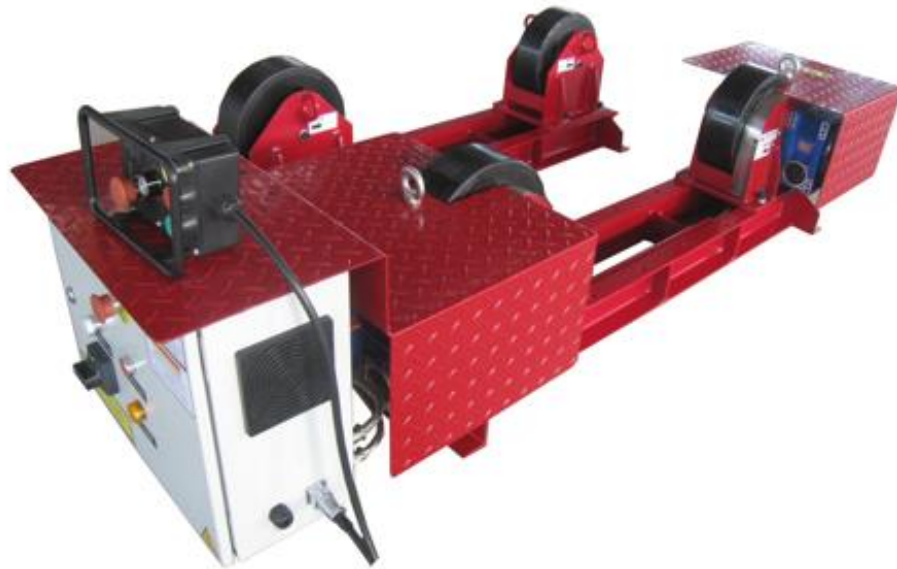

1	Model	MGCR5
2	Capacity (Loading)	5 Metric Ton
3	Capacity (Turning)	7.5 Metric Ton
4	Vessel Size (Min.)	Φ240 at 70° included Angle
5	Vessel Size (Max.)	Φ2500 at 43° included Angle
6	Tyre Type and Size	Polyurethane, Φ300mmx100mm
7	Electrical Panel	Yes
8	Roller Speed	190 to 1900mm/min at 5to 50Hz
9	Incoming Supply	415V-3P-50Hz
10	Control Voltage	24V AC
11	Roller Drive Control	0.75KW AC Inverter
12	Control Means	Via Push Button Pendant c/w 10m Cable
13	Roller Drive Motor	0.55kw c/w force cooling
14	Cooling Fan Supply	230V-1P-50Hz
15	Surface Preparation	Grit blast to SA2.5
16	Painting	Spray paint
17	Color	RAL 3003 Red
18	Width	410mm
19	Height	456mm
20	Length	2130mm
21	Weight	368 KG